

ProxKey® II Fob

125 kHz Proximity Key Fob



The RF-programmable ProxKey® II proximity keyfob incorporates proximity technology into a convenient device approximately the size of an automotive key.

Offers extremely consistent read range. Unaffected by body shielding or variable environmental conditions, even when close to keys and coins.

The key fob is small and convenient to use and can be carried with keys in pocket or handbag.

Long life is achieved because the key fob has a no-battery design allowing for an infinite number of reads.

Durability is exceptionally important to ensure long-term security and reduce maintenance costs. The ProxKey® II is strong, flexible and resistant to cracking and breaking.

Features

- Offers universal compatibility with all HID proximity readers.
- Provides an external number for easy identification and control.
- Can be placed on a key ring for convenient entry.
- Supports formats up to 85 bits, with over 137 billion codes.



tel 1300 886 380 ■ fax 1300 301 749


email sales@idwtechnologies.com.au ■ website www.idwtechnologies.com.au

ProxKey® II Fob



Specifications

Typical Maximum* Read Range	ProxPoint® Plus reader-up to 1.5" (3.7 cm) MiniProx™ reader-up to 2" (5 cm) ThinLine® II reader-up to 2" (5 cm) ProxPro® reader-up to 3" (7.5 cm) ProxPro® II reader-up to 4" (10.2 cm) Prox80™-up to 2" (5.1 cm) MaxiProx® reader-up to 12" (28 cm) *Dependent upon installation conditions.
Dimensions (WxHxDcm)	4.3 x 2.29 x 1.4 cm (1.90" x 0.900" x 0.550")
Key Fob Construction	Ultrasonically welded, ABS shell
Operating Temperature	-45° to 70° C (-50° to 160° F)
Operating Humidity	5-95% non-condensing
Operating Frequency	125 kHz
Weight	7.4 grams (0.26oz)
Quick Description	RF-programmable, 125 kHz, charcoal gray, customer-specified ID Numbers, key ring included.
Options	<ul style="list-style-type: none"> External card numbering (inkjet or laser engraving)

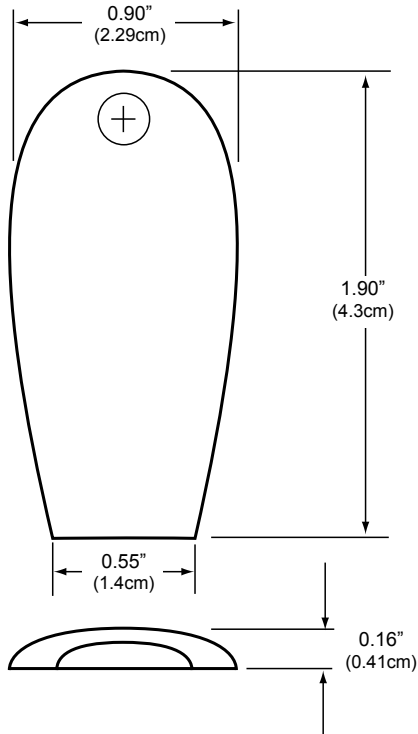

tel 1300 886 380 ■ fax 1300 301 749

email sales@idwtechnologies.com.au ■ website www.idwtechnologies.com.au

